

# VITAFLOW 1568 - 1" EDUCTOR

## Materials of Construction

Body & Diffuser Bronze B 62  
Nozzle Monel or 316 Stainless


## GENERAL SPECIFICATIONS

Suction Lift Up to - 20 Feet  
Discharge Head Up to 80 Feet  
Inlet Pressure 50 - 150 PSI  
Inlet Quantity 4 - 24 GPM  
Suction Capacity 8 - 32 GPM

## Flanges

150 LB ANSI B16.24 Flat Face  
(also available DIN, JIS, Metric, or undrilled)

The 1568 Flanged Eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that needs to be pumped dry.

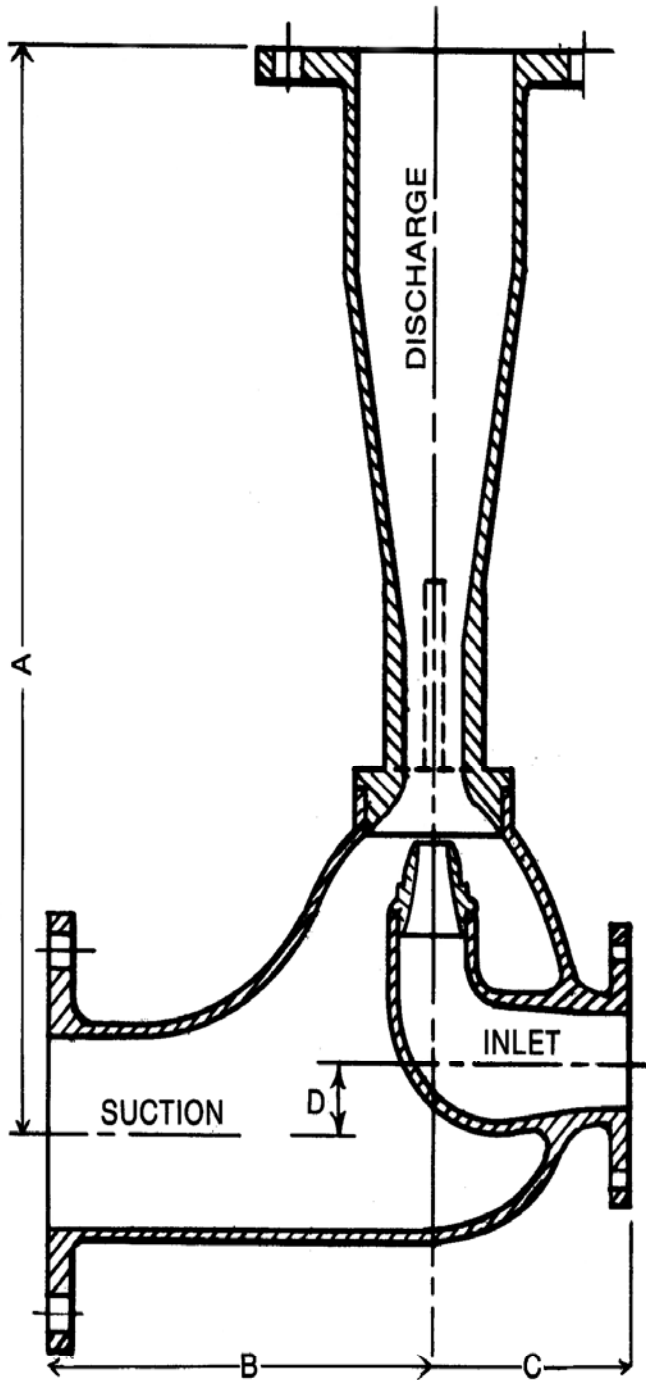

SIZE	INLET	SUCTION	DISCHARGE
I.D.	3/4"	1"	1"
O.D.	4 1/4"	4 1/4"	4 1/4"
THICK	7/16"	7/16"	7/16"
B.C.	3 1/8"	3 1/8"	3 1/8"
# Holes	4	4	4
HOLE Ø	9/16"	9/16"	9/16"

## Dimensions:

Inlet 3/4"  
Suction 1"  
Discharge 1"  
  
'A' 5 1/2"  
'B' 3 1/2"  
'C' 2 1/4"  
'D' 1/2"  
Weight 6 Lbs

MODEL	Suct. &		A	B	C	D	WT. LBS.
	Disch.	Inlet					
1568-1"	1"	3/4"	5 1/2"	3 1/2"	2 1/4"	1/2"	6

VITAFLOW, LLC  
576 N. Birdneck Rd, Unit 142,  
Virginia Beach, VA 23451,  
Michael Hume, COO,  
Ph: 904/316-5774, mhume@vitaflow.com

